


Product Information

Floor testing machines Z100 up to Z250 SH/SE of the Allround-Line



Composite Machine

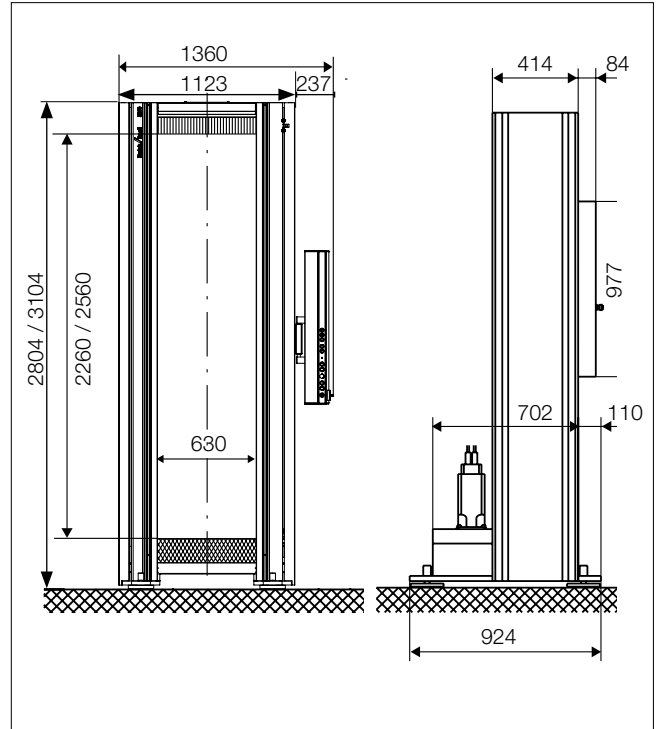

General advantages of Allround-Line with Zwick testControl II electronics

Modern load-frame design

- Drive is via maintenance-free, digitally controlled AC drive technology, which in combination with the innovative motor feedback system ensures excellent constant velocity properties, even at very low speeds.
- Mechanical connections with large mating surfaces and robustly dimensioned components ensure a high level of machine stiffness, which in combination with precise crosshead guidance minimizes undesirable mechanical influences on the specimen.

High level of operator convenience

- Ergonomics are top priority when it comes to operating the new Allround-Line machine.
- Adjustable for optimum ergonomic configuration; modular design allows adaptation as and when required.
- Adjustable crossheads allow variable test area configuration.
- Base design features damping elements with leveling facility plus space for lift truck access - easily adapted to suit the installation site.

Innovative electronics

The new *testControl II* measurement and control electronics provide the ideal basis for precise, reproducible test results. Impressive features include new drive technology, high measured-value acquisition-rates and a high level of modularity (full details on Page 2).

Highest safety standards

Allround-Line guarantees a high degree of protection for user, test results, specimen material and testing system. Only the latest safety technology and proven industrial components are used, while all testing systems comply with the EC Machinery Directive.

Future-proof

Modular design means that the testing system can be re-equipped or upgraded whenever required. Moreover, the *testControl II* control electronics are compatible with the future generation of Zwick software, with spare parts available for a minimum of ten years after the product has been discontinued.

Product Information

Floor testing machines Z100 up to Z250 SH/SE of the Allround-Line

Data	Value
Load frame	
Finish	RAL 7021 black grey and RAL 7038 agate grey
Ambient temperature	+10 ... +35 °C
Air humidity (non-condensing)	20 ... 90 %
Drive system	
Motor	AC servo-motor with concentrated windings Hiperface® motor feedback system
Input signal, set-value preset	digital (real-time Ethernet, EtherCAT®)
Controller / Cycle time	adaptive / 1000 Hz
Positioning, repetition accuracy on the crosshead	± 2 µm
Measurement and control electronics	
Number of slots available for measurement and control modules	2 synchronized module bus slots (expandable to 6)* 2 synchronised PCIe slots
Force measurement	grade 0.5 / 1 see load cell, to DIN EN ISO 7500-1, ASTM E4, JIS B7721
Calculated resolution (for example in tensile / compression direction)	24 bits
Effective resolution in tensile / compression direction	20 bits (corresponds to ± 1.000.000 points)
Data acquisition rate, internal	400 kHz
Test data transmission rate to the PC	500 Hz (optional 2000 Hz)
Zero-point correction	automatically at measurement begin
Measurement signal runtime correction for all channels	yes
Interface for PC	Ethernet
Eco Mode	yes, power section automatically switched off (time adjustable)
CE conformity	yes, according to machine guidelines 2006/42/EG
Power ratings	
Mains frequency	50/60 Hz
Electrical connections	400V +/- 10% (3Ph, N, PE)

* A high-quality USC measurement module for a load cell is included in delivery (occupies one module bus slot).

testControl II - options, e.g.

Description	Item number
Option <i>testControl II</i> plus: Activation of four additional slots, for <i>testControl II</i> testing machines.	057983
2000 Hz Online test data transmission: Increasing the test data transmission from 500 Hz (standard) to 2000 Hz. The test data is transmitted to <i>testXpert® II</i> , and is processed in real-time.	057860
Display remote control for <i>testControl II</i> for effective, ergonomic operation of the materials testing machine	057984

Options on request, e.g.

- Supplementary crossheads for the additional second test area
- CE-compliant electrically lockable safety shields
- Mounting platforms

Product Information

Floor testing machines Z100 up to Z250 SH/SE of the Allround-Line

Type	Z100 SH	Z250 SH	Z250 SE	
Item number	068930 ⁽³⁾	068924 ⁽³⁾	069412 ⁽³⁾	
Load frame				
Test load F_N in tensile / compression direction	100	250	250	kN
Height	2804	2804	3104	mm
Width	1123	1123	1123	mm
Width with electronics console	1360	1360	1360	mm
Depth	924	924	924	mm
Test area width ⁽¹⁾	630	630	630	mm
Test area height ⁽²⁾				
1st size: upper, crosshead top				mm
2nd size: lower, crosshead top				mm
3rd size: lower, crossh. bottom	2260	2260	2560	mm
4th size: upper & lower, with additional crosshead	2175	2175	2475	mm
Overall weight with electronics	2155	2155	2455	kg
Noise level at maximum test speed	1455	1455	1510	kg
	70	70	70	dB (A)
Drive system				
Crosshead speed up to 110% of test load ($v_{min} \dots v_{Nom}$)	0,00005 ... 1000	0,00005 ... 600	0,00005 ... 600	mm/min
Accuracy of the set speed	0.05	0.05	0.05	% of set speed
Increased crosshead return speed (at reduced force)	1500	1000	1000	mm/min
Drive system's travel resolution	0.0034	0.0021	0.0021	µm
Power ratings				
Power rating	5	6	6	kVA

⁽¹⁾ Test area width: the daylight between the side panels.

⁽²⁾ Test area height: the max. distance of the moving crosshead to the upper, i.e. lower crosshead, without any mountings.


^{(1) (2)} A description to these dimensions on the first and the last page.

⁽³⁾ These machines must be mounted with the supplied mounting kit on the ground.


Product Information

Floor testing machines Z100 up to Z250 SH/SE of the Allround-Line

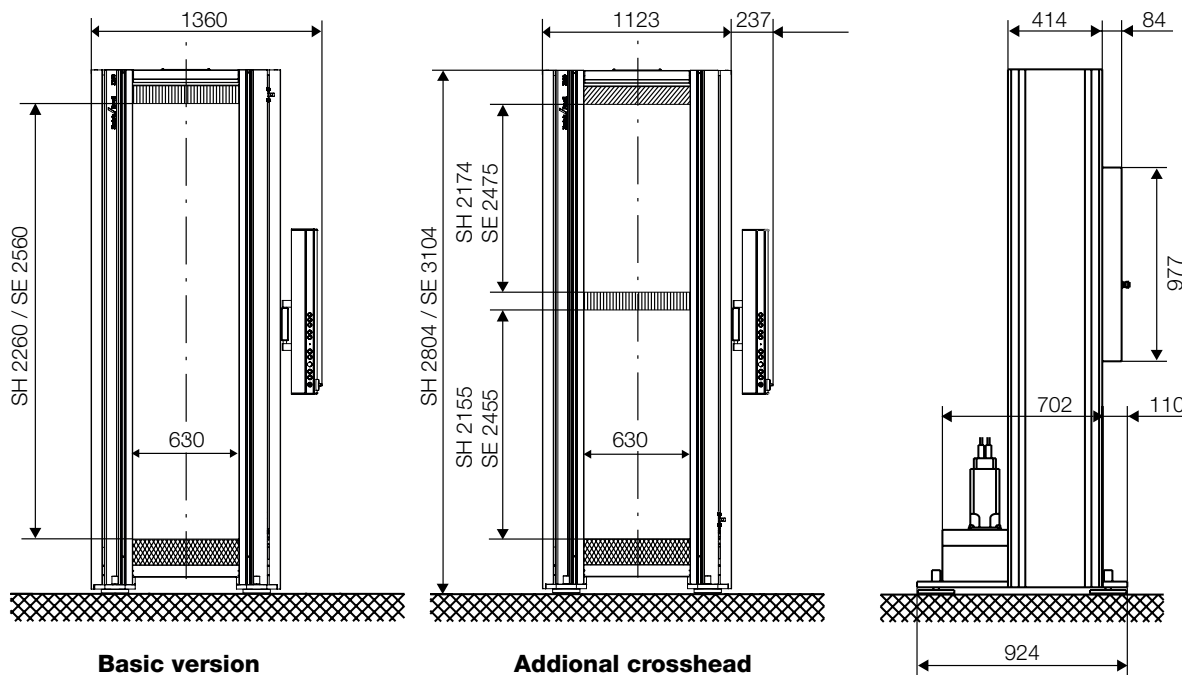


Machine dimensions

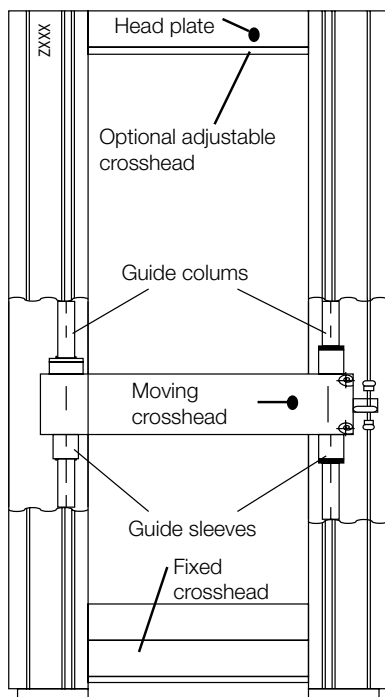

Principle drawing



Legend

-  Adjustable crosshead (option)
-  Moving crosshead
-  Fixed crosshead