

Product Information

Materials testing machine with hybrid drive Z1200Y



Figure: Zwick Z1200Y with hydraulic grips

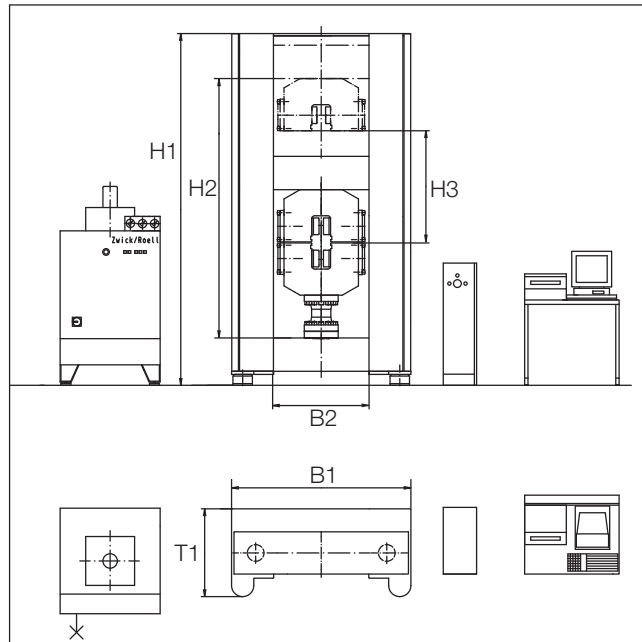


Figure: Drawing of Zwick Z1200Y with hydraulic grips

Key benefits

- These patented materials testing machines are fitted with a hybrid drive and two hydraulic working cylinders, on each side of the test area.
- High-resolution, channel-synchronized measurement technology provides extremely precise, accurate determination of material characteristic values. No range-switching is necessary as load signal resolution is available over the whole range.
- Patented Zwick hybrid drive for large test loads covers the widest possible specimen range.
- Hybrid drive combines the advantages of hydraulic load application (simple load generation, robust, low wear) with mechanical precision (high positional accuracy of $\pm 1 \mu\text{m}$ under load).
- Hybrid drive concept separates load generation from drive control, allowing test conditions to be reproduced with a very high degree of accuracy.

Further advantages and features

- Wide measuring range allows precise determination of even small test loads without re-tooling.
- Long travel combined with comparatively low build-height ensures trouble-free specimen clamping and convenient testing over a wide range of specimen lengths.
- Standard tests using Zwick *testXpert*® software require only single-button operation.
- Modular design throughout the system allows the entire Zwick accessory range to be used, including a wide variety of extensometers, specimen grips and other test tools.
- Should new test requirements arise, additional test tools (e.g. calibration blocks) can very easily be installed by means of a T-slot or screw system.
- Can be tailored to customers' specific requirements (e.g. test devices, specimen grips, test speed ranges, testing software).

Product Information

Materials testing machine with hybrid drive Z1200Y

Model	Z1200Y
Fmax [kN]	1200
[lb]	270000
Number of drive columns	2
Stiffness of load frame	
crosshead deflection and elongation of columns [kN/mm]	1400
including load cell, hydraulic grips and drive [kN/mm]	770
Dimensions of load frame	
H1 – Height [mm]	3166
B1 – Width [mm]	1614
T1 – Depth [mm]	790
Dimensions of test area	
H2 – Height [mm]	2330
B2 – Width [mm]	860
Test stroke max.	
H3 – with hydraulic grips (including load cell) [mm]	1000
Test speed [mm/min]	0.001 – 250
Weight	
without tools / specimen grips (with electronics) [kg]	5000
including pair of specimen grips [kg]	6300
Specific floor loading [kg/cm ²]	9
Accuracy grade of load cell	
0,5 from ... on [kN]	12
1 from ... on [kN]	2.4
Resolution of crosshead travel [µm/Impuls]	0.05
Item no.	• 358429
	(BPC-F1200YN.R11)

Enviromental conditions	
Operating temperature [°C]	+10 ... +35
Storage temperature [°C]	-25 ... +55
Humidity range (not condensing) [%]	≤ 90
Electrical connection	
Mains voltage 3 Ph/N/PE ^{1 2} [V]	400
Mains frequency [Hz]	50
Drive power [kVA]	15
Fuse [A]	32
Noise level in 1m distance [dB(A)]	67
Color coating of rack	RAL7011 (iron gray), RAL7038 (agate gray)

¹ Three phase AC motor (L1, L2, L3), neutral wire N, protective earth PE

² < ± 10 % related to the mains voltage