

Product Information

Materials testing machine with ball lead screw drive
Z400E / Z400RED



Figure: Zwick Z400E with hydraulic grips

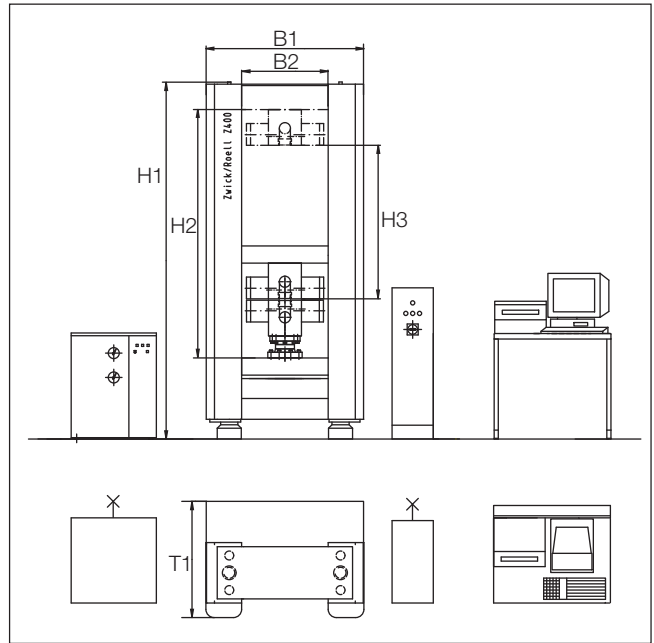


Figure: Drawing of Zwick Z400E with hydraulic grips

Key benefits

- These electro-mechanical materials testing machines are fitted with a ball lead screw drive.
- Wide measuring range allows precise determination of even small test loads without re-tooling.
- Long travel combined with comparatively low build-height provides trouble-free specimen clamping and user-friendly testing over a wide range of specimen lengths.
- Low-maintenance, pre-stressed ball lead screws ensure accurate, long-term tensile and compression testing.

Z400RED compact version

- The Z400RED is a variant of the Z400E with fixed lower test area. The package includes a stable base with levelling damper units.
- A cost-effective alternative to the Z400E for applications not requiring a large test area.

Further advantages and features

- The load frame is robust and extremely stiff.
- Standard tests using Zwick *testXpert*® software require only single-button operation.
- Modular design throughout the system allows the entire Zwick accessory range to be used, including a wide variety of extensometers, specimen grips and other test tools.
- Should new test requirements arise, additional test tools (e.g. calibration blocks) are easily installed via a T-slot or screw system.
- Can be tailored to customers' specific requirements (e.g. test area dimensions, test devices, specimen grips, test speed ranges, testing software).

Product Information

Materials testing machine with ball lead screw drive Z400E / Z400RED

Model	Z400E	Z400RED
Fmax [kN]	400	400
[lb]	90000	90000
Number of lead columns	4	4
Number of drive columns (ball lead screws)	2	2
Stiffness of load frame		
crosshead deflection and elongation of lead screw drive approx. [kN/mm]	450	450
including load cell, hydraulic grips and drive approx. [kN/mm]	200	200
Dimensions of load frame		
H1 – Height [mm]	2600	2600
B1 – Width [mm]	1145	1145
T1 – Depth [mm]	845	845
Base	–	505
Dimensions of test area		
H2 – Height [mm]	1800	1550
B2 – Width [mm]	630	630
Test stroke max.		
without tools / specimen grips [mm]	1630	1380
H3 – with hydraulic grips 8595 (including load cell) [mm]	1115	865
H4 – with wedge grips 8520 (including load cell) [mm]	810	560
Test speed [mm/min]	0.001 – 250	0.001 – 250
Weight		
without tools / specimen grips (with electronics) [kg]	2000	1700
with specimen grips [kg]	2600	2300
Specific floor loading [kg/cm ²]	4	4
Resolution of crosshead travel [µm/Impuls]	0.0035	0.0035
Position accuracy [µm]	0.5	0.5
Item no.		
1 central test area	• 359885 (BPC-F0400EN.R04)	• 039732 (BPC-F0400ER.R04)
2 test areas ¹	• 358431 (BPC-F0400EN.K04)	

Environmental conditions		
Operating temperature [°C]	+10 ... +35	
Storage temperature [°C]	-25 ... +55	
Humidity range (not condensing) [%]	< 90	
Electrical connection		
Mains voltage 3 Ph/N/PE ^{2,3} [V]	400	
Mains frequency [Hz]	50 / 60	
Drive power		
without specimen grips [kVA]	6	
with hydraulic grips [kVA]	9	
Fuse [kW]	16	
Noise level at 1m distance [dB(A)]	< 65	
Color coating of rack	RAL 7011 (iron gray), RAL 7038 (agate gray)	

¹ With 2 test areas the height of the test area, the crosshead travel and the weight changes

² Three phase AC motor (L1, L2, L3), neutral wire N, protective earth PE

³ < ± 10 % related to the mains voltage